


Product Specification and Technical Data


Type & Composition		PVC Laminated Floor covering
Application		Commercial, Residential
Surface treatment		PU & Anti-bacterial (Nano Silver)
Profile		Beveled / Non-beveled, per design
Tile Size	EN427	Wood Pattern : 184 x 950 mm (7.2" x 37.4") Stone Tile : 470 x 470 mm (18.5" x 18.5")
Total thickness	EN428	3.0 mm
Wear layer thickness	EN429	0.3 mm
Weight		5.03 kg/sq.m. (THK 3.0 / 0.3 mm)
Classification	EN685	Domestic 23 / Commercial 31
Fire rating	EN13501-1	Bfi -S1
	ASTME648	Class1
	ASTME84	75 or Less
	Mekel Burner Test	Pass
Heat Stability	KSM3802	0.3mm/0.01"(80°C+2°C, 6hr/hr)
Abrasion resistance	ASTMD3884	0.1% Loss
Slip resistance	ADA	Exceeds ADA requirement
Static Coefficient of Friction	ASTMC1028	Dry:0.72(°√0.50)
		Wet:0.67(°√0.50)
Color fastness	ISO 105-B02	≥6
Dimensional stability	EN434	Pass
Flexibility	EN435	Pass

PATTERN

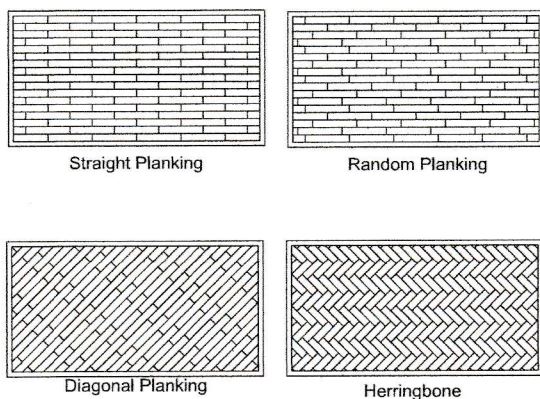

Stain&Chemical Resistance(KSM3802.,24hr-Exposure)

MATERIAL	RATING	MATERIAL	RATING
95% Ethyl Alcohol	0	Nitric Acid 70%	1
Cement Paste	0	Sulfuric Acid 96%	1
10% Ammonium Hydroxide	0	Methylene Chloride	2
Milk	0	Soy Sauce	0
5% Acetic Acid	0	Soy Bean Oil	0
5% Hydrochloric Acid	0	Lubricant	0
Kerosene	0	Coffee	0
Sesame Oil	0	Tea	0
Acetone	2	Ketchup	0
Nail Polish Remover	2		



PK NEWNESS CO.,LTD.

we keep you moving.

PK NEWNESS CO.,LTD.

198/151 Moo 12 Manthana-Bangna Bangphliyai, Bangphli,
Samutprakarn 10540 Thailand

TEL : 081 918 8985

FAX : 02 130 5401